

8101.172 Minex Lite 3~

Grindex drainage pumps are designed for professional use in tough applications like mines, construction sites, tunnel sites and other demanding industries. They are designed for pumping water that may contain solids


– up to the size of the strainer holes. Grindex drainage pumps are designed for continuous, unattended operation. They have proven their reliability and dependable performance in demanding areas like building and construction, mining, tunnelling, quarries, industries and rental applications.



Technical specification



Curves according to: Water [100%], 4 °C, 999.9 kg/m³, 1.569 mm²/s

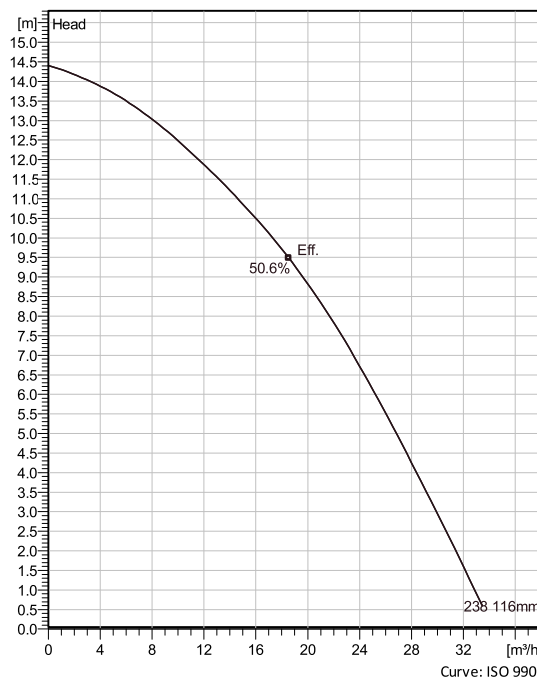

Configuration

Motor number K8101.172 13-06-2BB-W 1.2KW	Installation type S - Portable Semi permanent, Wet
Impeller diameter 116 mm	Discharge diameter 50 mm

Pump information

Impeller diameter 116 mm
Discharge diameter 50 mm
Inlet diameter 50 mm
Maximum operating speed 2700 rpm
Number of blades 2

Materials

Impeller Hard-Iron

Project

Block 0

Created by

Created on 5/13/2020

Last update

8101.172 Minex Lite 3~

Technical specification



Motor - General

Motor number K8101.172 13-06-2BB-W 1.2KW	Phases 3~	Rated speed 2700 rpm	Rated power 1.2 kW
ATEX approved No	Number of poles 2	Rated current 4.8 A	Stator variant 1
Frequency 50 Hz	Rated voltage 220 V	Insulation class F	Type of Duty S1

Motor - Technical

Power factor - 1/1 Load 0.89	Motor efficiency - 1/1 Load 74.2 %	Total moment of inertia 0.00234 kg m ²	Starts per hour max. 15
Power factor - 3/4 Load 0.84	Motor efficiency - 3/4 Load 78.9 %	Starting current, direct starting 20 A	
Power factor - 1/2 Load 0.74	Motor efficiency - 1/2 Load 80.9 %	Starting current, star-delta 6.67 A	

Project

Block 0

Created by

Created on 5/13/2020

Last update

8101.172 Minex Lite 3~


Performance curve



Duty point

Flow

Head

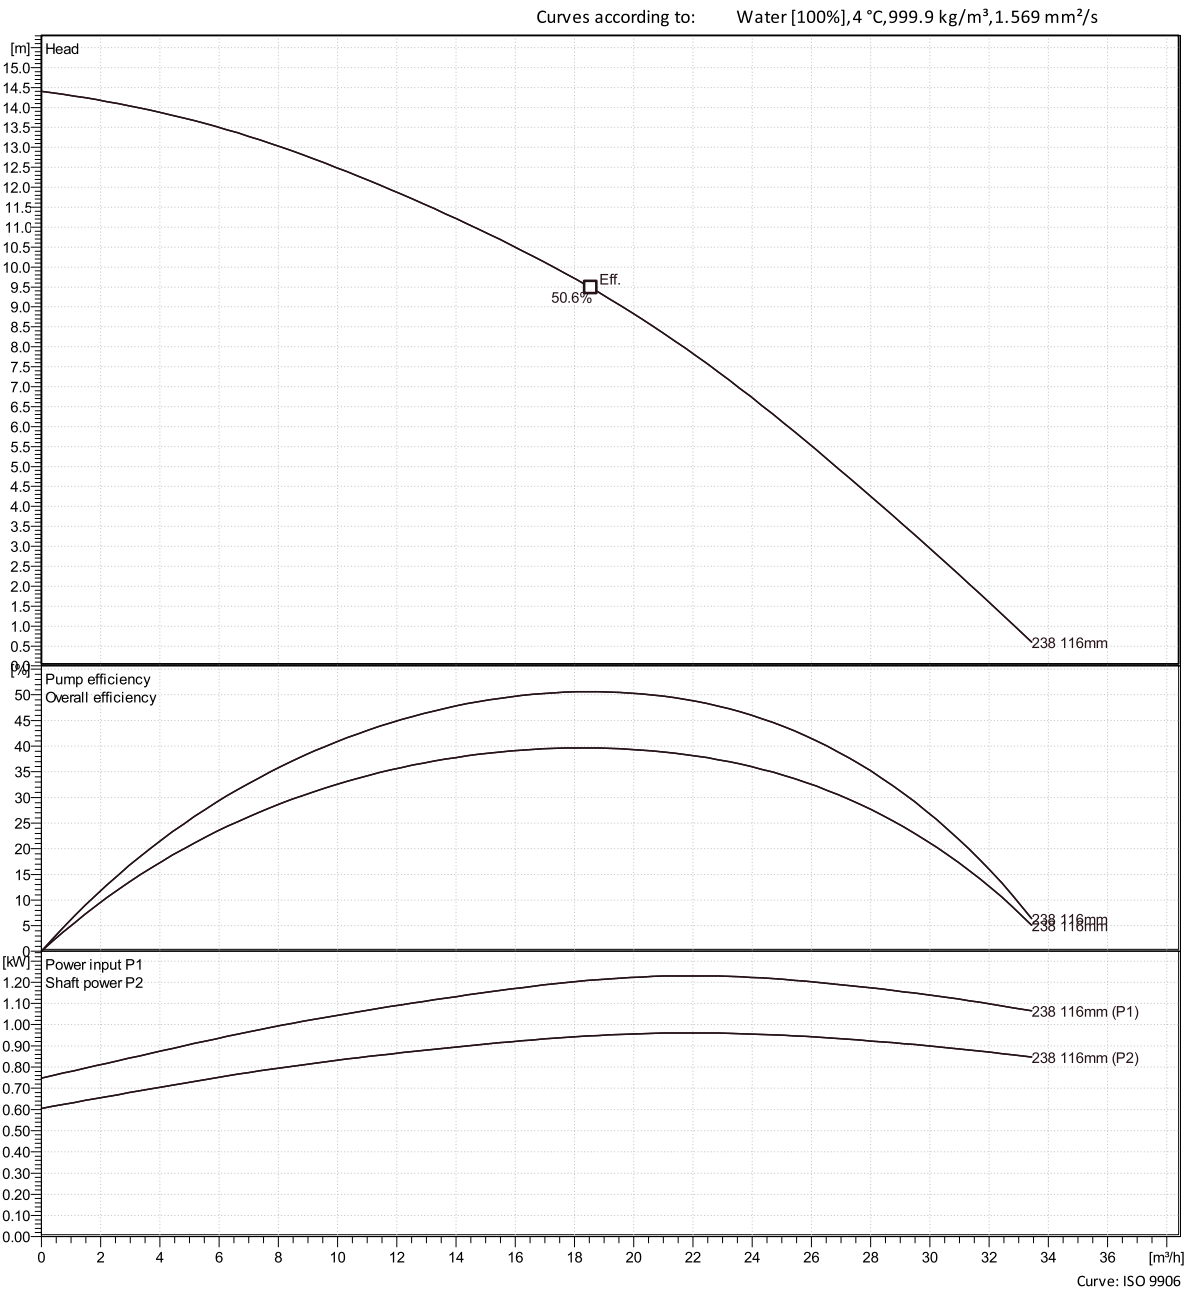


Project		Created by		Last update
Block	0	Created on	5/13/2020	

8101.172 Minex Lite 3~

Duty Analysis



Curves according to: Water [100%], 4 °C, 999.9 kg/m³, 1.569 mm²/s

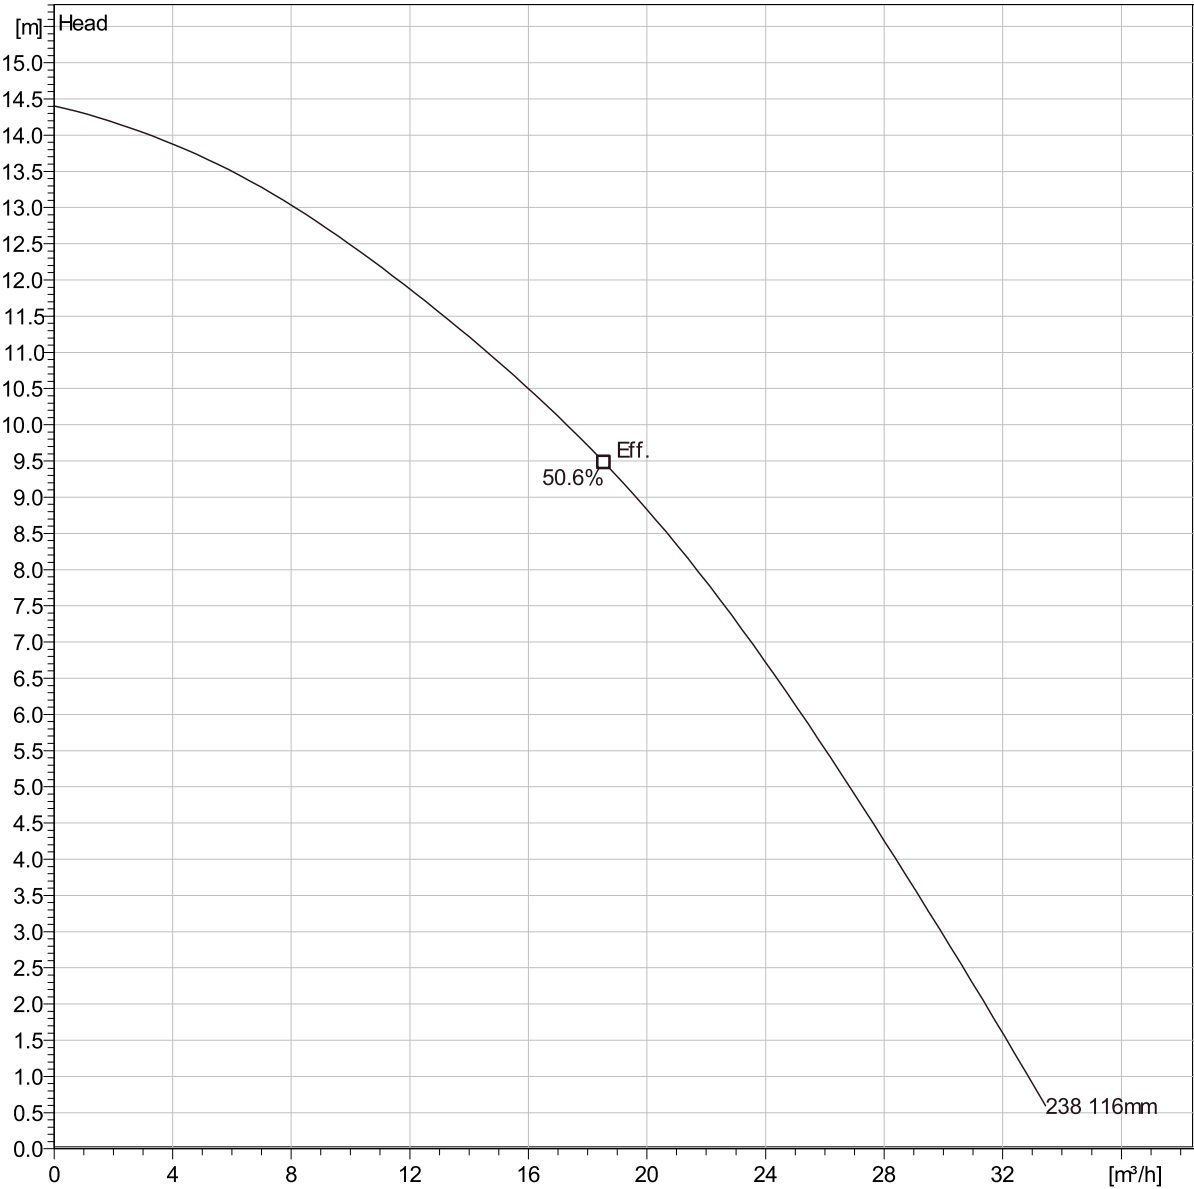

Curve: ISO 9906

Operating characteristics

Pumps/Syste ms	Flow	Head	Shaft power	Flow	Head	Shaft power	Hydr.eff.	Specific Energy	NPSHr
-------------------	------	------	-------------	------	------	-------------	-----------	--------------------	-------

Project		Created by		Last update	
Block	0	Created on	5/13/2020		