
Grindex sludge pumps are designed for professional use in tough applications like mines, construction sites, tunnel sites and other demanding industries. They are designed for pumping water with high content of solids, up to the size of 80 mm. The pumps are designed for continuous, unattended operation. They have proven their reliability and dependable performance in demanding areas like building and construction, mining, tunnelling, quarries, industries, car washes and rental applications.



Technical specification



Curves according to: Water [100%], 4 °C, 999.9 kg/m³, 1.569 mm²/s

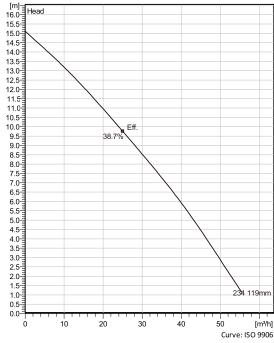

Configuration

Motor number D8109.282 13-10-2BB-W 2.2KW

Impeller diameter

119 mm

Installation type
S - Portable Semi
permanent, Wet
Discharge diameter
80 mm

Pump information

Impeller diameter

119 mm

Discharge diameter

80 mm

Inlet diameter 80 mm

Maximum operating speed

2780 rpm

Number of blades

6

Materials

Impeller Hard-Iron

Stator housing material

Aluminium

Project Created by Last update

Block 0 Created on 5/13/2020

Technical specification

Motor - General

D8109.282 13-10-2BB-W

Motor number

ATEX approved

Frequency

50 Hz

No

Phases 3~

Number of poles

Rated voltage 220 V Rated speed 2780 rpm

Rated current 8.1 A

Insulation class

Rated power 2.2 kW

Stator variant

G grindex

Type of Duty

Motor - Technical

Power factor - 1/1 Load

Power factor - 3/4 Load

0.84

Power factor - 1/2 Load

0.73

Motor efficiency - 1/1 Load

80.0 %

Motor efficiency - 3/4 Load

83.5 %

Motor efficiency - 1/2 Load

84.5 %

Total moment of inertia

0.0025 kg m²

Starting current, direct starting

44 A

Starting current, star-delta

14.7 A

Starts per hour max.

 Project
 Created by
 Last update

 Block
 0
 Created on
 5/13/2020


Performance curve

Duty point

Flow


Head



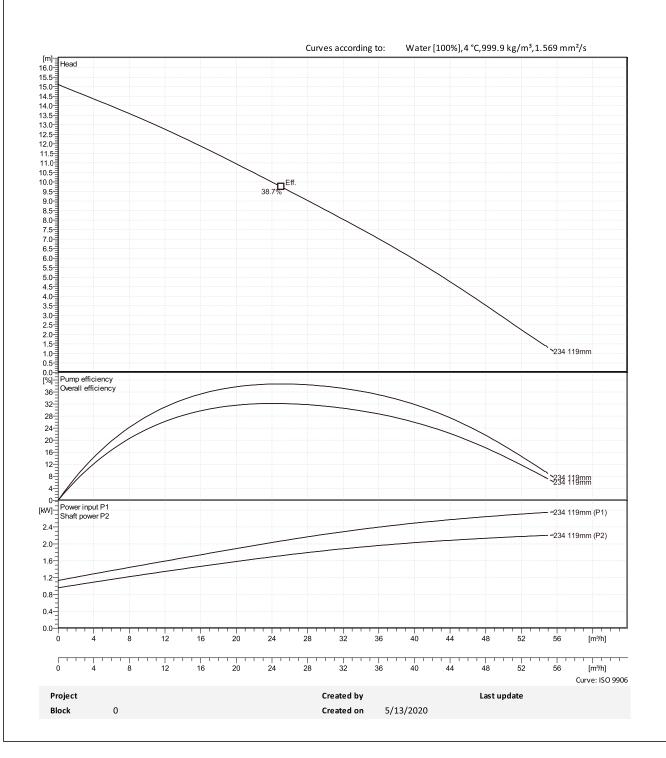

Duty Analysis




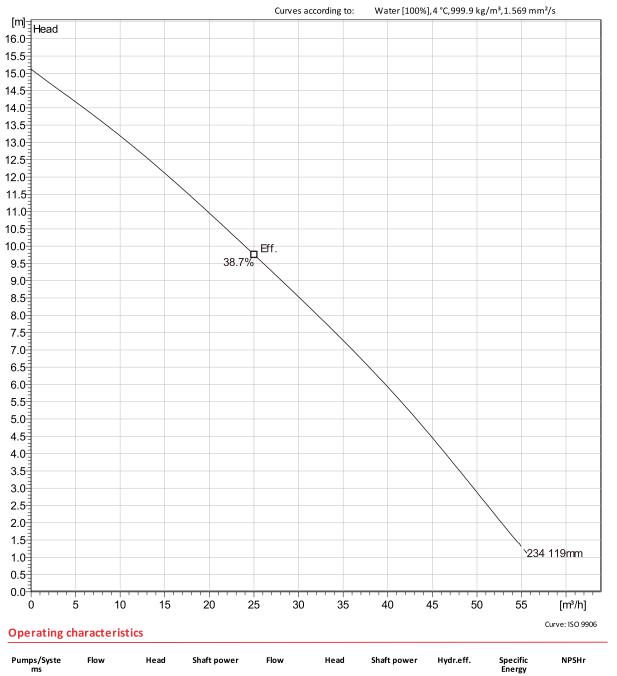

Project		Created by	Last update
Block	0	Created on	5/13/2020

Dimensional drawing



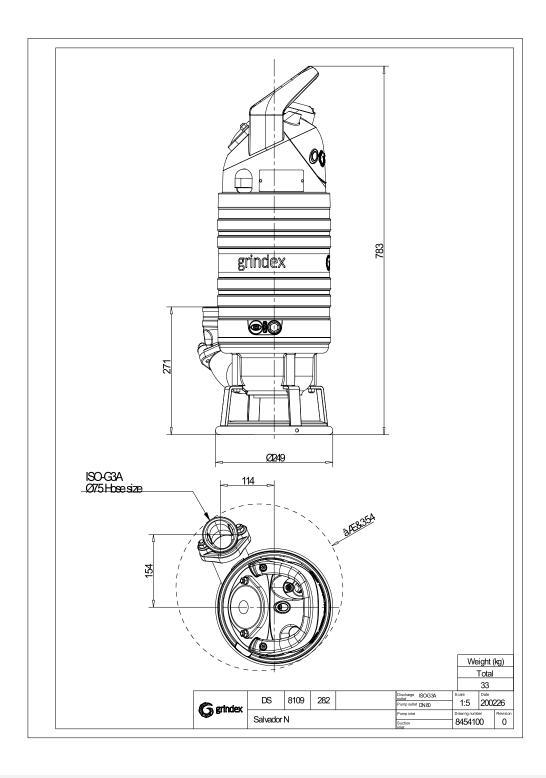

Project		Created by		Last update
Block	0	Created on	5/13/2020	