
Grindex sludge pumps are designed for professional use in tough applications like mines, construction sites, tunnel sites and other demanding industries. They are designed for pumping water with high content of solids, up to the size of 80 mm. The pumps are designed for continuous, unattended operation. They have proven their reliability and dependable performance in demanding areas like building and construction, mining, tunnelling, quarries, industries, car washes and rental applications.



Technical specification



Curves according to: Water [100%], 4 °C, 999.9 kg/m³, 1.569 mm²/s

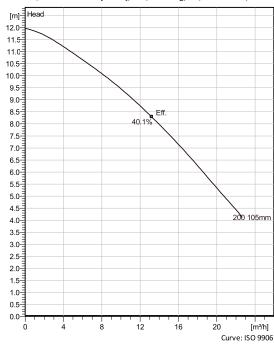

Configuration

Motor number D8123.281 12-08-2BB-W 0.9KW

Impeller diameter

105 mm

Installation type S - Portable Semi permanent, Wet

Discharge diameter 50 mm

Pump information

Impeller diameter

105 mm

Discharge diameter 50 mm

Inlet diameter

Maximum operating speed

2800 rpm

Number of blades

Materials

Impeller

Project Created by Last update Block

Created on 5/13/2020

Technical specification

Motor - General

Motor number D8123.281 12-08-2BB-W

ATEX approved No

Frequency 50 Hz

Phases 1~

Number of poles

Rated voltage 115 V

Rated speed 2800 rpm

Rated current

11 A

Insulation class

Rated power 0.9 kW

Stator variant

G grindex

Type of Duty

Motor - Technical

Power factor - 1/1 Load

Power factor - 3/4 Load

0.96

Power factor - 1/2 Load

0.93

Motor efficiency - 1/1 Load

Motor efficiency - 3/4 Load

77.8 %

Motor efficiency - 1/2 Load

76.0 %

Total moment of inertia

0.001 kg m²

Starting current, direct starting

43 A

Starting current, star-delta

14.3 A

Starts per hour max.

Project Created by Last update Block


5/13/2020 Created on

Performance curve

Duty point


Flow Head



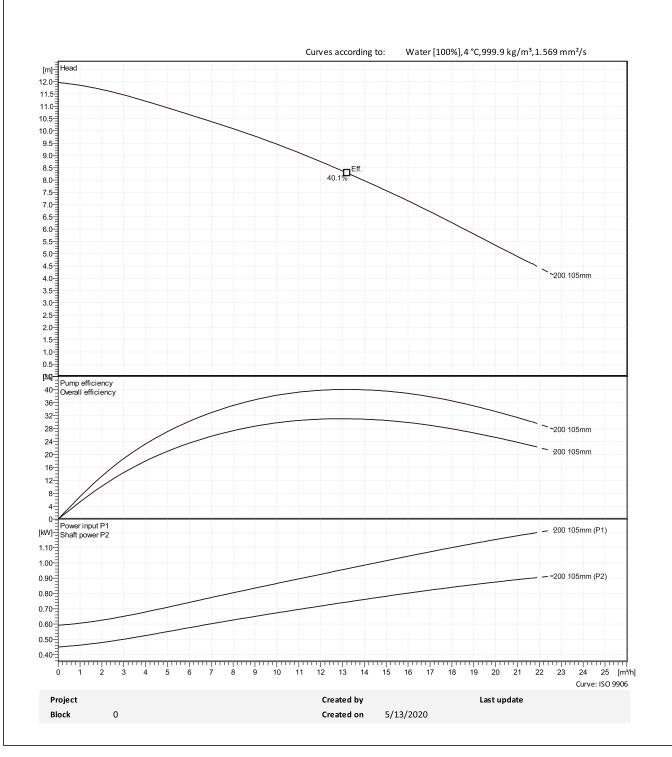

Duty Analysis



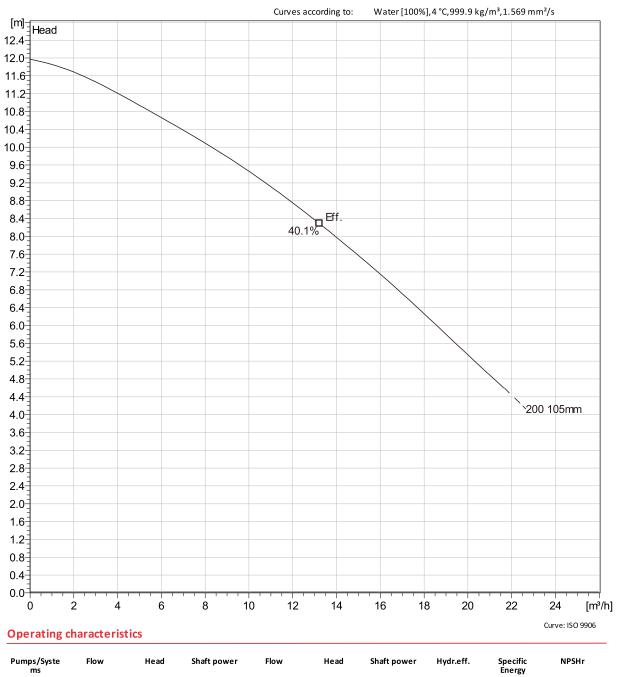

Project		Created by	Last update
Block	0	Created on 5/13/2020	

Dimensional drawing



Project Created by Last update

 $\textbf{Block} \qquad \qquad \textbf{0} \qquad \qquad \textbf{Created on} \qquad 5/13/2020$