Grindex drainage pumps are designed for professional use in tough applications like mines, construction sites, tunnel sites and other demanding industries. They are designed for pumping water that may contain solids


 up to the size of the strainer holes. Grindex drainage pumps are designed for continuous, unattended operation. They have proven their reliability and dependable performance in demanding areas like building and construction, mining, tunnelling, quarries, industries and rental applications.

# Technical specification





Curves according to: Water, pure [100%], 4 °C, 999.9 kg/m³, 1.5692 mm²/s

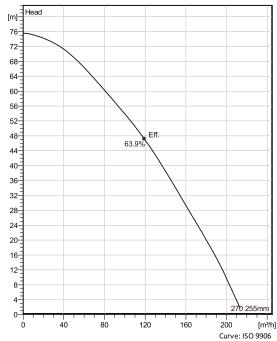

#### Configuration

**Motor number** B8107.300 25-18-2AA-W 25KW

Impeller diameter 255 mm Installation type S - Portable Semi permanent, Wet Discharge diameter 100 mm

#### **Pump information**

Impeller diameter 255 mm

Discharge diameter 100 mm

Inlet diameter

**Maximum operating speed** 2910 rpm

Number of blades

Materials

Impeller Stainless steel

Stator housing material Aluminium

## Technical specification

#### **Motor - General**

Motor number B8107.300 25-18-2AA-W

**Approval** No

Frequency 50 Hz

Phases 3~

Number of poles

Rated voltage 400 V

Rated speed 2910 rpm

Rated current 43 A

Insulation class

Rated power 25 kW

Stator variant

**G** grindex

Type of Duty

#### **Motor - Technical**

Power factor - 1/1 Load

Power factor - 3/4 Load

0.92

Power factor - 1/2 Load

0.87

Motor efficiency - 1/1 Load

Motor efficiency - 3/4 Load

91.1 %

Motor efficiency - 1/2 Load

92.2 %

Total moment of inertia

0.0852 kg m<sup>2</sup>

Starting current, direct starting

269 A

Starting current, star-delta

89.7 A

Starts per hour max.


Head

Performance curve

**Duty point** 


Flow



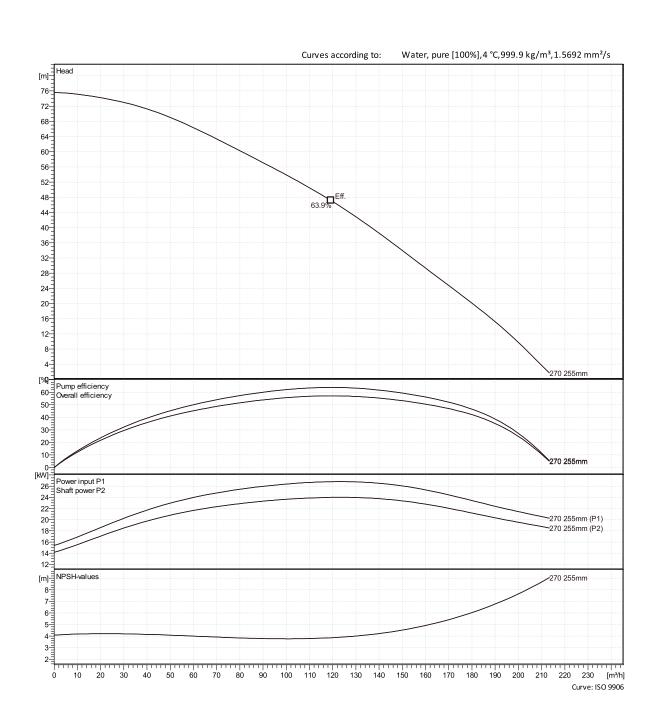

**Duty Analysis** 



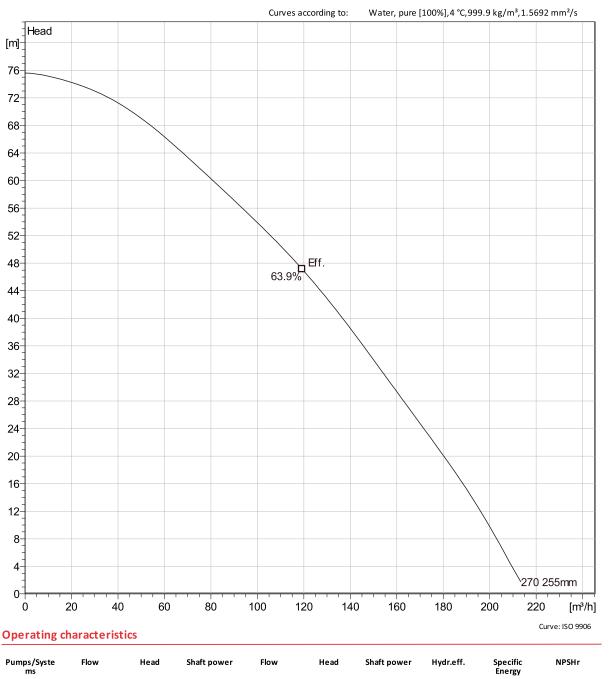

8107.300 Maxi H-Lite 3~ Dimensional drawing	<b>G</b> grindex